


Safety / Solar Control Film

100-Micron – Dark Reflective Silver

Code: SA-20RS/100-iSR

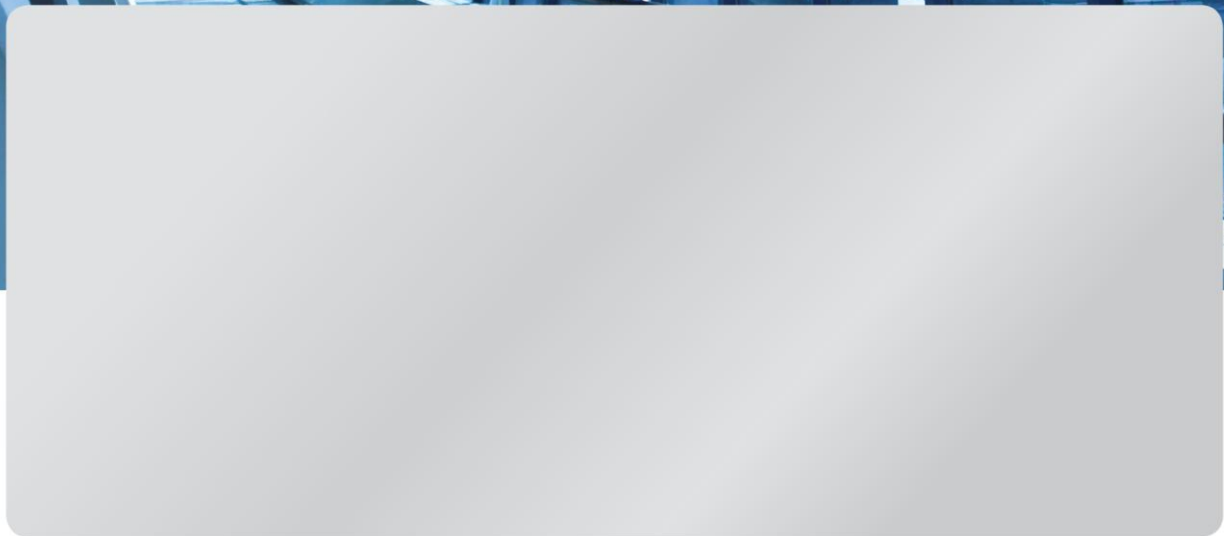

Performance Data

Total Solar Energy

Transmitted	12%
Reflected	48%
Absorbed	40%

Visible light

Transmitted	17%
Reflected	51%
Ultra-Violet Rejected	<99%
Glare Reduction	80%
Shading Coefficient	0.26
Total Solar Energy Rejected	77%

Physical Properties

Description	Dark Tint
Film Thickness	100-Microns (4-thou)
Structure	Multi-ply Laminate
Tensile Strength	25,000 PSI
Break Strength	100 Pounds per Inch (width)
Adhesive Type	Acrylic Pressure Sensitive
Peel Strength	6 to 7 Pounds per Inch

Specification:

The safety/solar control film is to be **Opalux® SA-20RS/100-iSR**, as manufactured by Opalux® (www.opalux.co.uk). The window film is to be installed to the **interior** side of the glass, and the unique product roll numbers used are to be registered in accordance with the manufacturer's warranty procedure.

Notes:

Test results are produced from film applied to clear glass. Performance data is subject to change without prior notice. Accurate selection of window film requires specialist knowledge, and it is recommended that specifiers contact the company at the specification stage. It is the users' responsibility to ensure the product is suitable for the intended use. The seller shall not be liable for any direct or consequential loss howsoever arising.